

ROUND TUBE DISPENSER HEATED SERIE **RTD-H**

SPECIFICATIONS:


- Stainless steel 304 # 4
- Carrier head is suspended by calibrated springs from and under carriage frame assembly
- Four guides on top flange for china stability
- On / Off switch and pilot light mounted on the top flange
- Non-insulated construction (available in option only)

APPLICATIONS:

- Service counters
- Back bars
- Serving stations
- Buffet counters
- Dispenser cart

ELECTRICS:

- CSA APPROVED
- 120V- 60Hz- 1PH- 310Watts
- NEMA 5-15P

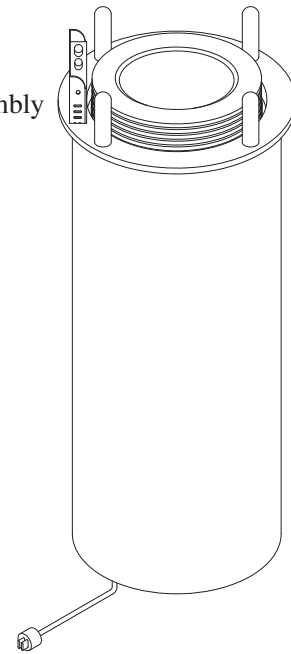

HEIGHT FROM MOUNTING SURFACE TO BOTTOM OF UNIT IS 25" / 635 mm.
OTHER SIZES AVAILABLE UPON REQUEST

MODEL NUMBER	DINNERWARE DIAMETER Inch / mm	COUNTER FLANGE Inch / mm	OVERALL FLANGE Inch / mm	HEATER WATTAGE	SHIPPING WEIGHT APP. Lbs. / Kg
RTD-H-4.50	4.00" / 102 mm	6.50" / 165 mm	7.50" / 191 mm	310 watts	29 Lbs. / 2.7 Kg
RTD-H-5.00	4.50" / 114 mm	7.00" / 178 mm	8.00" / 203 mm	310 watts	
RTD-H-5.50	5.00" / 127 mm	7.50" / 191 mm	8.50" / 216 mm	310 watts	
RTD-H-6.00	5.50" / 140 mm	8.00" / 203 mm	9.00" / 229 mm	310 watts	
RTD-H-6.50	6.00" / 152 mm	8.50" / 216 mm	9.50" / 241 mm	310 watts	29 Lbs. / 3.1 Kg
RTD-H-7.00	6.50" / 165 mm	9.00" / 229 mm	10.00" / 254 mm	310 watts	
RTD-H-7.50	7.00" / 178 mm	9.50" / 241 mm	10.50" / 267 mm	310 watts	
RTD-H-8.00	7.50" / 191 mm	10.00" / 254 mm	11.00" / 279 mm	310 watts	30 Lbs. / 4.1 Kg
RTD-H-8.50	8.00" / 203 mm	10.50" / 267 mm	11.50" / 292 mm	310 watts	
RTD-H-9.00	8.50" / 216 mm	11.00" / 279 mm	12.00" / 305 mm	310 watts	
RTD-H-9.50	9.00" / 229 mm	11.50" / 292 mm	12.50" / 318 mm	310 watts	
RTD-H-10.00	9.50" / 241 mm	12.00" / 305 mm	13.00" / 330 mm	310 watts	31 Lbs. / 5.0 Kg
RTD-H-10.50	10.00" / 254 mm	12.50" / 318 mm	13.50" / 343 mm	310 watts	
RTD-H-11.00	10.50" / 267 mm	13.00" / 330 mm	14.00" / 356 mm	310 watts	
RTD-H-11.50	11.00" / 279 mm	13.50" / 343 mm	14.50" / 368 mm	310 watts	31 Lbs. / 5.9 Kg
RTD-H-12.00	11.50" / 292 mm	14.00" / 356 mm	15.00" / 381 mm	310 watts	
RTD-H-12.50	12.00" / 305 mm	14.50" / 368 mm	15.50" / 394 mm	310 watts	

